


Immersion

ARMTO-2 Medium Weight Oil Applications


- 2" NPT Steel Screw Plug
- Steel Sheath Elements
- 15 W/In²
- 2 - 6 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

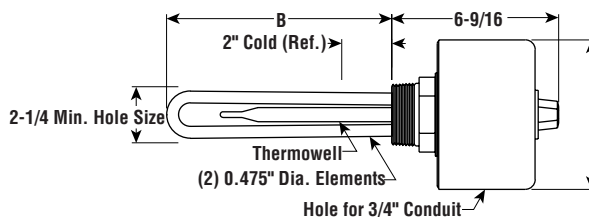

E2 — Dimensions (Inches)

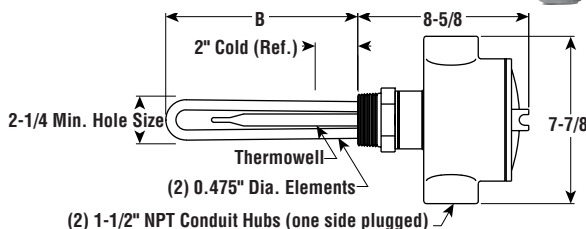

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T3 — Temperature (200 - 550°F)			T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹															
2	240	1	15	2	24-7/8	8	ARMTO-2020T3	AS	324208	ARMTO-2020T2	AS	324216	ARMTO-2020T1	AS	324224
2	480	1	15	2	24-7/8	8	ARMTO-2020T3	AS	324267	ARMTO-2020T2	AS	324275	ARMTO-2020T1	AS	324283
2.66	240	1	15	2	32-3/4	9	ARMTO-2026T3	AS	324320	ARMTO-2026T2	AS	324339	ARMTO-2026T1	AS	324347
2.66	480	1	15	2	32-3/4	9	ARMTO-2026T3	AS	324380	ARMTO-2026T2	AS	324398	ARMTO-2026T1	AS	324400
3.33	240	1	15	2	40-1/4	9	ARMTO-2033T3	AS	324443	ARMTO-2033T2	AS	324451	ARMTO-2033T1	AS	324460
3.33	480	1	15	2	40-1/4	9	ARMTO-2033T3	AS	324507	ARMTO-2033T2	AS	324515	ARMTO-2033T1	AS	324523
4	208	1	15	2	47-3/4	10	ARMTO-2040T3	AS	324566	ARMTO-2040T2	AS	324574	ARMTO-2040T1	AS	324582
4	240	1	15	2	47-3/4	10	ARMTO-2040T3	AS	324620	ARMTO-2040T2	AS	324638	ARMTO-2040T1	AS	324646
4	480	1	15	2	47-3/4	10	ARMTO-2040T3	AS	324689	ARMTO-2040T2	AS	324697	ARMTO-2040T1	AS	324700
5	240	1	15	2	57-1/2	11	ARMTO-2050T3	AS	324742	ARMTO-2050T2	AS	324750	ARMTO-2050T1	AS	324769
5	480	1	15	2	57-1/2	11	ARMTO-2050T3	AS	324806	ARMTO-2050T2	AS	324814	ARMTO-2050T1	AS	324822
6	240	1	15	2	67-3/4	12	ARMTO-2060T3	AS	324865	ARMTO-2060T2	AS	324873	ARMTO-2060T1	AS	324881
6	480	1	15	2	67-3/4	12	ARMTO-2060T3	AS	324929	ARMTO-2060T2	AS	324937	ARMTO-2060T1	AS	324945
E2 Moisture Resistant/Explosion Resistant²															
2	240	1	15	2	24-7/8	13	ARMTO-2020E2T3	AS	324232	ARMTO-2020E2T2	NS	324240	ARMTO-2020E2T1	AS	324259
2	480	1	15	2	24-7/8	13	ARMTO-2020E2T3	AS	324291	ARMTO-2020E2T2	AS	324304	ARMTO-2020E2T1	AS	324312
2.66	240	1	15	2	32-3/4	14	ARMTO-2026E2T3	AS	324355	ARMTO-2026E2T2	AS	324363	ARMTO-2026E2T1	AS	324371
2.66	480	1	15	2	32-3/4	14	ARMTO-2026E2T3	AS	324419	ARMTO-2026E2T2	AS	324427	ARMTO-2026E2T1	AS	324435
3.33	240	1	15	2	40-1/4	14	ARMTO-2033E2T3	AS	324478	ARMTO-2033E2T2	AS	324486	ARMTO-2033E2T1	AS	324494
3.33	480	1	15	2	40-1/4	14	ARMTO-2033E2T3	AS	324531	ARMTO-2033E2T2	AS	324540	ARMTO-2033E2T1	AS	324558
4	208	1	15	2	47-3/4	15	ARMTO-2040E2T3	AS	324590	ARMTO-2040E2T2	AS	324603	ARMTO-2040E2T1	AS	324611
4	240	1	15	2	47-3/4	15	ARMTO-2040E2T3	AS	324654	ARMTO-2040E2T2	AS	324662	ARMTO-2040E2T1	AS	324670
4	480	1	15	2	47-3/4	15	ARMTO-2040E2T3	AS	324718	ARMTO-2040E2T2	AS	324726	ARMTO-2040E2T1	AS	324734
5	240	1	15	2	57-1/2	16	ARMTO-2050E2T3	AS	324777	ARMTO-2050E2T2	AS	324785	ARMTO-2050E2T1	AS	324793
5	480	1	15	2	57-1/2	16	ARMTO-2050E2T3	AS	324830	ARMTO-2050E2T2	AS	324849	ARMTO-2050E2T1	AS	324857
6	240	1	15	2	67-3/4	17	ARMTO-2060E2T3	AS	324890	ARMTO-2060E2T2	AS	324902	ARMTO-2060E2T1	AS	324910
6	480	1	15	2	67-3/4	17	ARMTO-2060E2T3	AS	324953	ARMTO-2060E2T2	AS	324961	ARMTO-2060E2T1	AS	324970

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed with T1 or T2 Temperature and CSA Certified with T1, T2 or T3 Temperature.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified with T1, T2 or T3 Temperature.