

Immersion


AREMTS-3

Process Water Applications


- 2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- High Watt Density (45 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

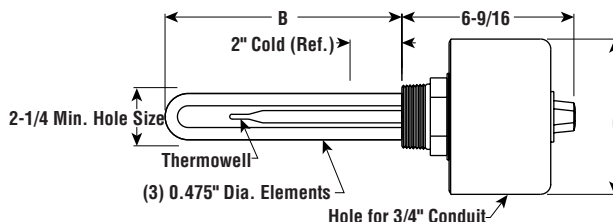

E2 — Dimensions (Inches)

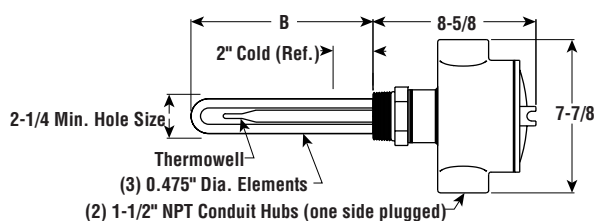

SCREW PLUG

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	45	3	7-3/4	7	AREMTS-3305T2	AS	097631	AREMTS-3305T1	AS	031851
3	480	3	45	3	7-3/4	7	AREMTS-3305T2	AS	097640	AREMTS-3305T1	AS	031860
6	240	3	45	3	17-3/4	8	AREMTS-3605T2	AS	097650	AREMTS-3605T1	AS	031878
6	480	3	45	3	17-3/4	8	AREMTS-3605T2	AS	097666	AREMTS-3605T1	AS	031886
9	240	3	45	3	24-7/8	9	AREMTS-3905T2	AS	097674	AREMTS-3905T1	AS	031894
9	480	3	45	3	24-7/8	9	AREMTS-3905T2	AS	097682	AREMTS-3905T1	AS	031907
12	240	3	45	3	32-7/16	10	AREMTS-31205T2	AS	097690	AREMTS-31205T1	AS	031915
12	480	3	45	3	32-7/16	10	AREMTS-31205T2	AS	097703	AREMTS-31205T1	AS	031923
15	240	3	45	3	40-3/8	11	AREMTS-31505T2	AS	097711	AREMTS-31505T1	AS	031931
15	480	3	45	3	40-3/8	11	AREMTS-31505T2	AS	097720	AREMTS-31505T1	AS	031940
18	240	3	45	3	47-7/8	12	AREMTS-31805T2	AS	097738	AREMTS-31805T1	AS	031958
18	480	3	45	3	47-7/8	12	AREMTS-31805T2	AS	097746	AREMTS-31805T1	AS	031966
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	45	3	7-3/4	12	AREMTS-3305E2T2	AS	031974	AREMTS-3305E2T1	AS	032096
3	480	3	45	3	7-3/4	12	AREMTS-3305E2T2	AS	031982	AREMTS-3305E2T1	AS	032109
6	240	3	45	3	17-3/4	13	AREMTS-3605E2T2	AS	031990	AREMTS-3605E2T1	AS	032117
6	480	3	45	3	17-3/4	13	AREMTS-3605E2T2	AS	032002	AREMTS-3605E2T1	AS	032125
9	240	3	45	3	24-7/8	14	AREMTS-3905E2T2	AS	032010	AREMTS-3905E2T1	AS	032133
9	480	3	45	3	24-7/8	14	AREMTS-3905E2T2	AS	032029	AREMTS-3905E2T1	AS	032141
12	240	3	45	3	32-7/16	15	AREMTS-31205E2T2	AS	032037	AREMTS-31205E2T1	AS	032150
12	480	3	45	3	32-7/16	15	AREMTS-31205E2T2	AS	032045	AREMTS-31205E2T1	AS	032168
15	240	3	45	3	40-3/8	16	AREMTS-31505E2T2	AS	032053	AREMTS-31505E2T1	AS	032176
15	480	3	45	3	40-3/8	16	AREMTS-31505E2T2	AS	032061	AREMTS-31505E2T1	AS	032184
18	240	3	45	3	47-7/8	17	AREMTS-31805E2T2	AS	032070	AREMTS-31805E2T1	AS	032192
18	480	3	45	3	47-7/8	17	AREMTS-31805E2T2	AS	032088	AREMTS-31805E2T1	AS	032205

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.



Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.