

Immersion


AREMTI-3

Severely Corrosive Solution Applications


- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- Low Watt Density (15 W/In²)
- 1 - 6 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

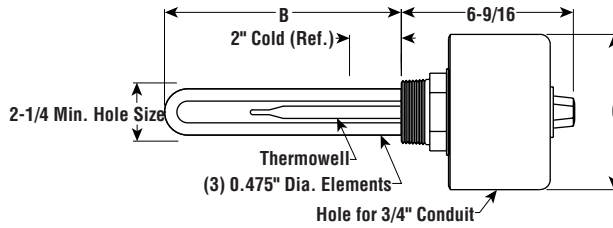

E2 — Dimensions (Inches)

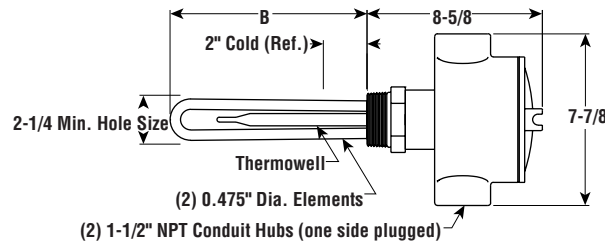

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
1	240	3	15	3	7-3/4	7	AREMTI-3015T2	AS	091563	AREMTI-3015T1	AS	034091
1	480	3	15	3	7-3/4	7	AREMTI-3015T2	AS	091571	AREMTI-3015T1	AS	034104
2	240	3	15	3	17-3/4	8	AREMTI-3025T2	AS	091580	AREMTI-3025T1	AS	034112
2	480	3	15	3	17-3/4	8	AREMTI-3025T2	AS	091598	AREMTI-3025T1	AS	034120
3	240	3	15	3	24-7/8	9	AREMTI-3035T2	AS	091600	AREMTI-3035T1	AS	034139
3	480	3	15	3	24-7/8	9	AREMTI-3035T2	AS	091619	AREMTI-3035T1	AS	034147
4	240	3	15	3	32-7/16	10	AREMTI-3045T2	AS	091627	AREMTI-3045T1	AS	034155
4	480	3	15	3	32-7/16	10	AREMTI-3045T2	AS	091635	AREMTI-3045T1	AS	034163
5	240	3	15	3	40-3/8	11	AREMTI-3055T2	AS	091643	AREMTI-3055T1	AS	034171
5	480	3	15	3	40-3/8	11	AREMTI-3055T2	AS	091651	AREMTI-3055T1	AS	034180
6	240	3	15	3	47-7/8	12	AREMTI-3065T2	AS	091660	AREMTI-3065T1	AS	034198
6	480	3	15	3	47-7/8	12	AREMTI-3065T2	AS	091678	AREMTI-3065T1	AS	034200
E2 Moisture Resistant/Explosion Resistant²												
1	240	3	15	3	7-3/4	12	AREMTI-3015E2T2	AS	034219	AREMTI-3015E2T1	AS	034331
1	480	3	15	3	7-3/4	12	AREMTI-3015E2T2	AS	034227	AREMTI-3015E2T1	AS	034340
2	240	3	15	3	17-3/4	13	AREMTI-3025E2T2	AS	034235	AREMTI-3025E2T1	AS	034358
2	480	3	15	3	17-3/4	13	AREMTI-3025E2T2	AS	034243	AREMTI-3025E2T1	AS	034366
3	240	3	15	3	24-7/8	14	AREMTI-3035E2T2	AS	034251	AREMTI-3035E2T1	AS	034374
3	480	3	15	3	24-7/8	14	AREMTI-3035E2T2	AS	034260	AREMTI-3035E2T1	AS	034382
4	240	3	15	3	32-7/16	15	AREMTI-3045E2T2	AS	034278	AREMTI-3045E2T1	AS	034390
4	480	3	15	3	32-7/16	15	AREMTI-3045E2T2	AS	034286	AREMTI-3045E2T1	AS	034403
5	240	3	15	3	40-3/8	16	AREMTI-3055E2T2	AS	034294	AREMTI-3055E2T1	AS	034411
5	480	3	15	3	40-3/8	16	AREMTI-3055E2T2	AS	034307	AREMTI-3055E2T1	AS	034420
6	240	3	15	3	47-7/8	17	AREMTI-3065E2T2	AS	034315	AREMTI-3065E2T1	AS	034438
6	480	3	15	3	47-7/8	17	AREMTI-3065E2T2	AS	034323	AREMTI-3065E2T1	AS	034446

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.