


Immersion

AREMTI-3 Solution Water Applications


- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (45 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 120, 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

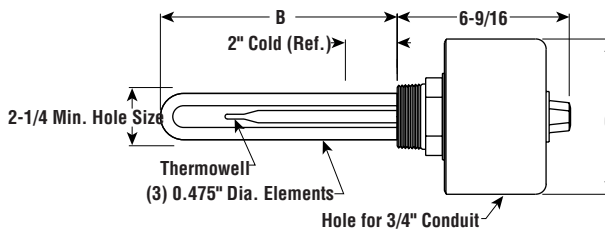

E2 — Dimensions (Inches)

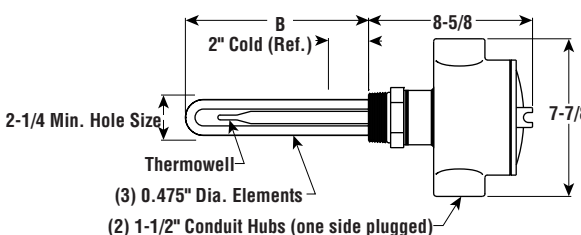

SCREW PLUG

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	45	3	7-3/4	7	AREMTI-3305T2	AS	097990	AREMTI-3305T1	AS	032213
3	480	3	45	3	7-3/4	7	AREMTI-3305T2	AS	098001	AREMTI-3305T1	AS	032221
6	240	3	45	3	17-3/4	8	AREMTI-3605T2	S	099160	AREMTI-3605T1	AS	032230
6	480	3	45	3	17-3/4	8	AREMTI-3605T2	S	099178	AREMTI-3605T1	AS	032248
9	240	3	45	3	24-7/8	9	AREMTI-3905T2	S	099186	AREMTI-3905T1	AS	032256
9	480	3	45	3	24-7/8	9	AREMTI-3905T2	AS	099194	AREMTI-3905T1	AS	032264
12	240	3	45	3	32-7/16	10	AREMTI-31205T2	AS	099207	AREMTI-31205T1	AS	032272
12	480	3	45	3	32-7/16	10	AREMTI-31205T2	S	099215	AREMTI-31205T1	AS	032280
15	240	3	45	3	40-3/8	11	AREMTI-31505T2	AS	099223	AREMTI-31505T1	AS	032299
15	480	3	45	3	40-3/8	11	AREMTI-31505T2	S	099231	AREMTI-31505T1	AS	032301
18	240	3	45	3	47-7/8	12	AREMTI-31805T2	AS	099240	AREMTI-31805T1	AS	032310
18	480	3	45	3	47-7/8	12	AREMTI-31805T2	S	099258	AREMTI-31805T1	AS	032328
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	45	3	7-3/4	12	AREMTI-3305E2T2	AS	032336	AREMTI-3305E2T1	AS	032459
3	480	3	45	3	7-3/4	12	AREMTI-3305E2T2	AS	032344	AREMTI-3305E2T1	AS	032467
6	240	3	45	3	17-3/4	13	AREMTI-3605E2T2	AS	032352	AREMTI-3605E2T1	AS	032475
6	480	3	45	3	17-3/4	13	AREMTI-3605E2T2	AS	032360	AREMTI-3605E2T1	AS	032483
9	240	3	45	3	24-7/8	14	AREMTI-3905E2T2	AS	032379	AREMTI-3905E2T1	AS	032491
9	480	3	45	3	24-7/8	14	AREMTI-3905E2T2	AS	032387	AREMTI-3905E2T1	AS	032504
12	240	3	45	3	32-7/16	15	AREMTI-31205E2T2	AS	032395	AREMTI-31205E2T1	AS	032512
12	480	3	45	3	32-7/16	15	AREMTI-31205E2T2	AS	032408	AREMTI-31205E2T1	AS	032520
15	240	3	45	3	40-3/8	16	AREMTI-31505E2T2	AS	032416	AREMTI-31505E2T1	AS	032539
15	480	3	45	3	40-3/8	16	AREMTI-31505E2T2	AS	032424	AREMTI-31505E2T1	AS	032547
18	240	3	45	3	47-7/8	17	AREMTI-31805E2T2	AS	032432	AREMTI-31805E2T1	AS	032555
18	480	3	45	3	47-7/8	17	AREMTI-31805E2T2	AS	032440	AREMTI-31805E2T1	AS	032563

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.