


Immersion

ARMTS-3 Process Water Applications



- 2-1/2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 208, 240 and 480 Volt, Three Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

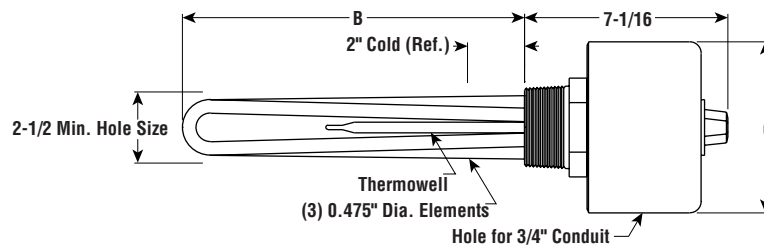

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose												
3	208	3	51	3	7	8	ARMTS-3305T2	AS	187100	ARMTS-3305T1	AS	187119
3	240	3	51	3	7	8	ARMTS-3305T2	AS	184786	ARMTS-3305T1	AS	184823
3	480	3	51	3	7	8	ARMTS-3305T2	AS	184794	ARMTS-3305T1	AS	184831
4.5	208	3	48	3	11	8	ARMTS-3455T2	AS	187143	ARMTS-3455T1	AS	187151
4.5	240	3	48	3	11	8	ARMTS-3455T2	AS	184866	ARMTS-3455T1	AS	184903
4.5	480	3	48	3	11	8	ARMTS-3455T2	AS	184874	ARMTS-3455T1	AS	184911
6	208	3	48	3	17	9	ARMTS-3605T2	AS	187186	ARMTS-3605T1	AS	187194
6	240	3	48	3	17	9	ARMTS-3605T2	AS	184946	ARMTS-3605T1	AS	184989
6	480	3	48	3	17	9	ARMTS-3605T2	AS	184955	ARMTS-3605T1	AS	184997
7.5	208	3	53	3	18-1/2	10	ARMTS-3755T2	AS	187223	ARMTS-3755T1	AS	187231
7.5	240	3	53	3	18-1/2	10	ARMTS-3755T2	AS	185025	ARMTS-3755T1	AS	185068
7.5	480	3	53	3	18-1/2	10	ARMTS-3755T2	AS	185033	ARMTS-3755T1	AS	185076
9	208	3	47	3	24	10	ARMTS-3905T2	AS	187266	ARMTS-3905T1	AS	187274
9	240	3	47	3	24	10	ARMTS-3905T2	AS	185105	ARMTS-3905T1	AS	185148
9	480	3	47	3	24	10	ARMTS-3905T2	AS	185113	ARMTS-3905T1	AS	185156
12	208	3	46	3	32	11	ARMTS-3120T2	AS	187305	ARMTS-3120T1	AS	187311
12	240	3	46	3	32	11	ARMTS-3120T2	AS	185180	ARMTS-3120T1	AS	185228
12	480	3	46	3	32	11	ARMTS-3120T2	AS	185199	ARMTS-3120T1	AS	185236
15	208	3	46	3	39-1/2	12	ARMTS-3150T2	AS	187346	ARMTS-3150T1	AS	187354
15	240	3	46	3	39-1/2	12	ARMTS-3150T2	AS	185260	ARMTS-3150T1	AS	185308
15	480	3	46	3	39-1/2	12	ARMTS-3150T2	AS	185279	ARMTS-3150T1	AS	185316
18	208	3	51	3	47	13	ARMTS-3180T2 ¹	AS	187389	ARMTS-3180T1 ¹	AS	187397
18	240	3	51	3	47	13	ARMTS-3180T2	AS	185340	ARMTS-3180T1	AS	185383
18	480	3	51	3	47	13	ARMTS-3180T2	AS	185359	ARMTS-3180T1	AS	185391

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not UL Listed or CSA Certified (Exceeds 48 Amps).

FASTShip

Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.

Immersion




ARMTS-3 Process Water Applications (cont'd.)



- 2-1/2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 208, 240 and 480 Volt, Single Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

E2 — Dimensions (Inches)

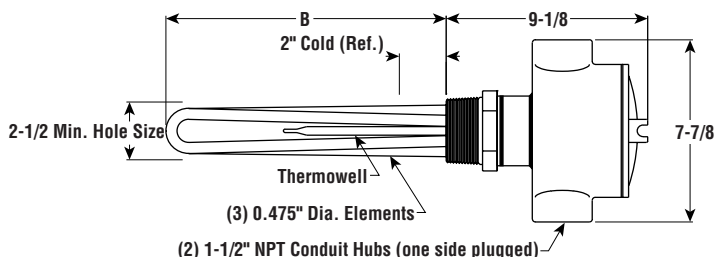

SCREW PLUG

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant												
3	208	3	51	3	7	13	ARMTS-3305E2T2	AS	187127	ARMTS-3305E2T1	AS	187135
3	240	3	51	3	7	13	ARMTS-3305E2T2	AS	184807	ARMTS-3305E2T1	AS	184840
3	480	3	51	3	7	13	ARMTS-3305E2T2	AS	184815	ARMTS-3305E2T1	AS	184858
4.5	208	3	48	3	11	13	ARMTS-3455E2T2	AS	187160	ARMTS-3455E2T1	AS	187178
4.5	240	3	48	3	11	13	ARMTS-3455E2T2	AS	184882	ARMTS-3455E2T1	AS	184920
4.5	480	3	48	3	11	13	ARMTS-3455E2T2	AS	184890	ARMTS-3455E2T1	AS	184938
6	208	3	48	3	17	14	ARMTS-3605E2T2	AS	187207	ARMTS-3605E2T1	AS	187215
6	240	3	48	3	17	14	ARMTS-3605E2T2	AS	184962	ARMTS-3605E2T1	AS	185009
6	480	3	48	3	17	14	ARMTS-3605E2T2	AS	184970	ARMTS-3605E2T1	AS	185017
7.5	208	3	53	3	18-1/2	15	ARMTS-3755E2T2	AS	187240	ARMTS-3755E2T1	AS	187258
7.5	240	3	53	3	18-1/2	15	ARMTS-3755E2T2	AS	185041	ARMTS-3755E2T1	AS	185084
7.5	480	3	53	3	18-1/2	15	ARMTS-3755E2T2	AS	185050	ARMTS-3755E2T1	AS	185092
9	208	3	47	3	24	15	ARMTS-3905E2T2	AS	187282	ARMTS-3905E2T1	AS	187290
9	240	3	47	3	24	15	ARMTS-3905E2T2	AS	185121	ARMTS-3905E2T1	AS	185164
9	480	3	47	3	24	15	ARMTS-3905E2T2	AS	185130	ARMTS-3905E2T1	AS	185172
12	208	3	46	3	32	16	ARMTS-3120E2T2	AS	187320	ARMTS-3120E2T1	AS	187338
12	240	3	46	3	32	16	ARMTS-3120E2T2	AS	185201	ARMTS-3120E2T1	AS	185244
12	480	3	46	3	32	16	ARMTS-3120E2T2	AS	185210	ARMTS-3120E2T1	AS	185252
15	208	3	46	3	39-1/2	17	ARMTS-3150E2T2	AS	187362	ARMTS-3150E2T1	AS	187370
15	240	3	46	3	39-1/2	17	ARMTS-3150E2T2	AS	185287	ARMTS-3150E2T1	AS	185324
15	480	3	46	3	39-1/2	17	ARMTS-3150E2T2	AS	185295	ARMTS-3150E2T1	AS	185332
18	208	3	51	3	47	18	ARMTS-3180E2T2 ¹	AS	187400	ARMTS-3180E2T1 ¹	AS	187418
18	240	3	51	3	47	18	ARMTS-3180E2T2	AS	185367	ARMTS-3180E2T1	AS	185404
18	480	3	51	3	47	18	ARMTS-3180E2T2	AS	185375	ARMTS-3180E2T1	AS	185412

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Not CSA NRTL/C Certified (Exceeds 48 Amps).



Same-day shipping on stock item orders received before 4 pm CST.
 3-day shipping on assembly-stock items.