


IAM-C



www.cablejoints.co.uk or www.heattracing.co.uk
Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582
www.thorneandderrick.co.uk

IAM - datasheet

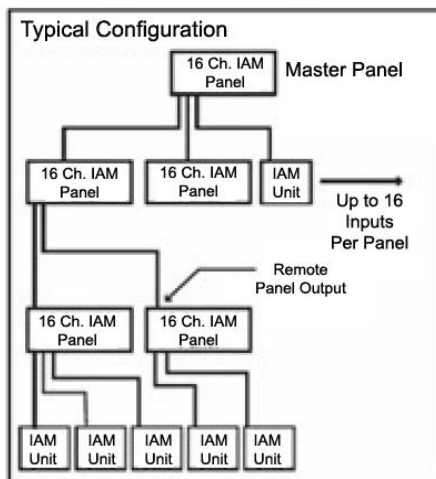

Dimensions and Weight:

Digital Display

262 x 265 x 84 mm – 2600 g

10.3 x 10.0 x 3.2 inches – 5.73 lbs

Applications ▶

The IAM-C panel enables effective and competitive construction and monitoring of large integrated detection systems.

It has 16 channels to which IAMs and IAM-C panels can be connected, and which displays any channel in alarm or a fault condition.

It provides visual, audible alarms and 2 relays that can be used to control external devices such as outside air conditioning units, valves, sirens, or to communicate with an existing control system.

Finally, a dedicated output signal to another IAM-C panel allows you to build detection systems of any size, up to thousands of IAMs and IAM-C panels.