


# Immersion

## EMTS-3

### Severely Corrosive Solution Applications


- 2" NPT Stainless Steel Passivated Screw Plug
- Stainless Steel Passivated Sheath Elements
- Low Watt Density (15 W/In<sup>2</sup>)
- 1 - 6 kW
- Without Thermostat
- 240 and 480 Volt, Three Phase
- General Purpose, Moisture Resistant/Explosion Resistant Terminal Enclosure or Moisture Resistant

E1 — Dimensions (Inches)

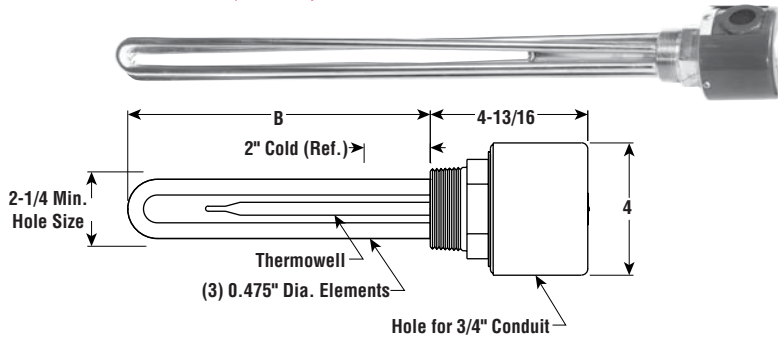


SCREW PLUG

E2 — Dimensions (Inches)

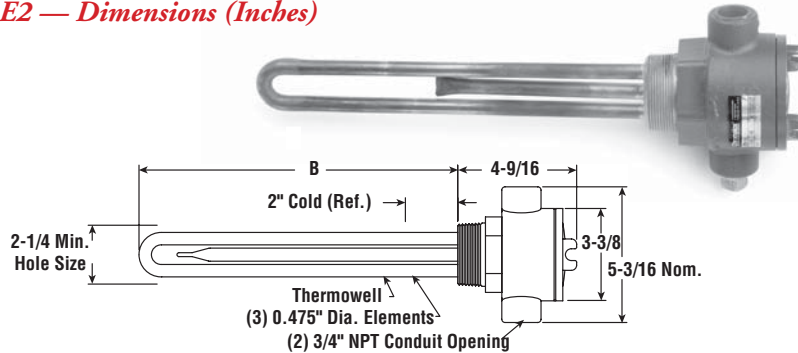

E4TP — Dimensions (Inches)

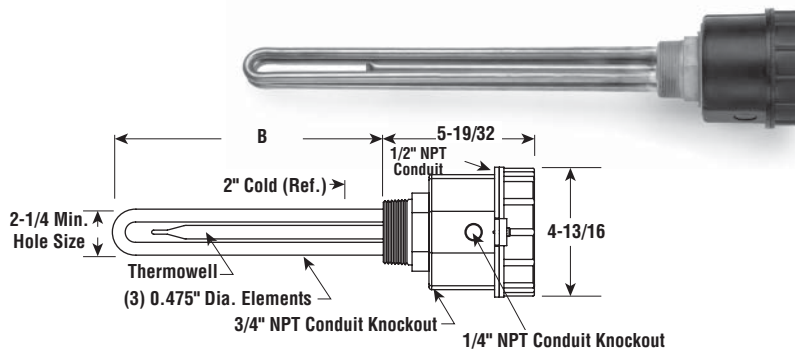

### Specifications and Ordering Information

						E1 General Purpose <sup>1</sup>				E2 Moisture Resistant/Explosion Resistant <sup>2</sup>				E4 Moisture Resistant			
kW	Volts	Phase	W/In <sup>2</sup>	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
1	240	3	15	3	7-3/4	EMTS-301	AS	090472	5	EMTS-301E2	AS	033611	8	EMTS-301E4TP	AS	061399	11
1	480	3	15	3	7-3/4	EMTS-301	AS	090480	5	EMTS-301E2	AS	033620	8	EMTS-301E4TP	AS	061401	11
2	240	3	15	3	17-3/4	EMTS-302	AS	090499	6	EMTS-302E2	AS	033638	9	EMTS-302E4TP	AS	061410	12
2	480	3	15	3	17-3/4	EMTS-302	AS	090501	6	EMTS-302E2	AS	033646	9	EMTS-302E4TP	AS	061428	12
3	240	3	15	3	24-7/8	EMTS-303	AS	091248	7	EMTS-303E2	AS	033654	10	EMTS-303E4TP	AS	061452	13
3	480	3	15	3	24-7/8	EMTS-303	AS	091256	7	EMTS-303E2	AS	033662	10	EMTS-303E4TP	AS	061460	13
4	240	3	15	3	32-7/16	EMTS-304	AS	091264	9	EMTS-304E2	AS	033670	12	EMTS-304E4TP	AS	061495	15
4	480	3	15	3	32-7/16	EMTS-304	AS	091272	9	EMTS-304E2	AS	033689	12	EMTS-304E4TP	AS	061508	15
5	240	3	15	3	40-3/8	EMTS-305	AS	091280	10	EMTS-305E2	AS	033697	13	EMTS-305E4TP	AS	061516	16
5	480	3	15	3	40-3/8	EMTS-305	AS	091299	10	EMTS-305E2	AS	033700	13	EMTS-305E4TP	AS	061524	16
6	240	3	15	3	47-7/8	EMTS-306	AS	091301	12	EMTS-306E2	AS	033718	15	EMTS-306E4TP	AS	061559	18
6	480	3	15	3	47-7/8	EMTS-306	AS	091310	12	EMTS-306E2	AS	033726	15	EMTS-306E4TP	AS	061567	18

Stock Status: S = stock AS = assembly stock NS = non-stock  
 To Order—Specify model, volts, phase, kW, PCN and quantity.



Same-day shipping on stock item orders received before 4 pm CST.  
 3-day shipping on assembly-stock items.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.