


Immersion


MTI-2 Solution Water Applications

- 2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 52 W/In²)
- 1.5 - 15 kW
- Without Thermostat
- 120, 240 and 480 Volt, Single Phase
- General Purpose, Moisture Resistant/Explosion Resistant Terminal Enclosure or Moisture Resistant


E1 — Dimensions (Inches)

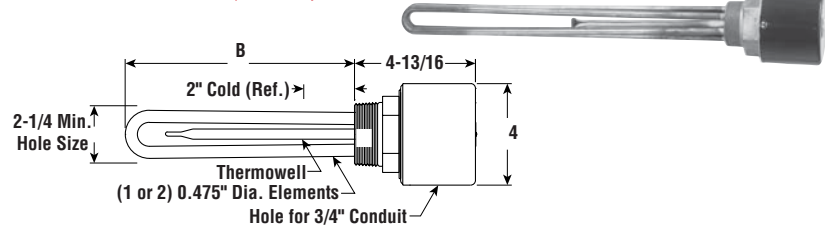

E2 — Dimensions (Inches)

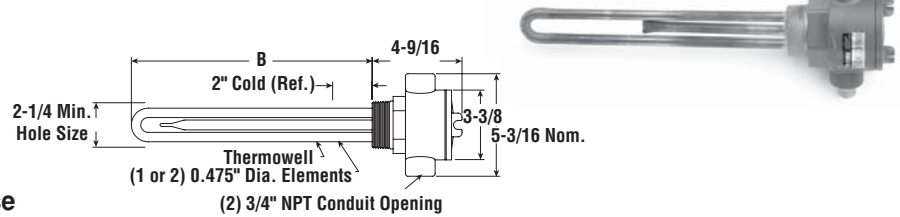

E4TP — Dimensions (Inches)

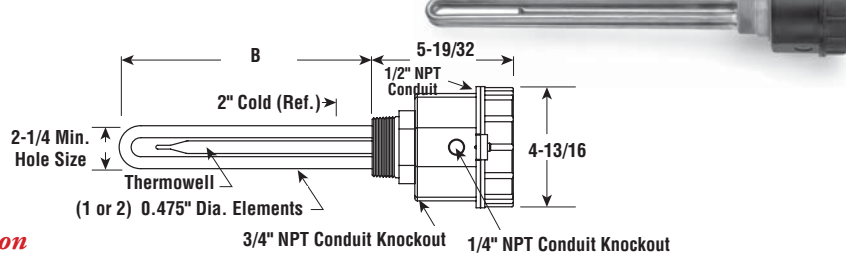

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²				E4 Moisture Resistant			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)	
1.5	120	1	48	1	11-7/16	MTI-215A	AS	190262	3	MTI-215E2	AS	185420	6	MTI-215E4TP	AS	062551	9	
1.5	240	1	48	1	11-7/16	MTI-215A	AS	190270	3	MTI-215E2	AS	185439	6	MTI-215E4TP	AS	062560	9	
1.5	480	1	48	1	11-7/16	MTI-215A	AS	190289	3	MTI-215E2	AS	185447	6	MTI-215E4TP	AS	062578	9	
2	120	1	48	1	17-1/2	MTI-220A	AS	190297	4	MTI-220E2	AS	185455	7	MTI-220E4TP	AS	062586	10	
2	240	1	48	1	17-1/2	MTI-220A	AS	190300	4	MTI-220E2	AS	185463	7	MTI-220E4TP	AS	062594	10	
2	480	1	48	1	17-1/2	MTI-220A	AS	190318	4	MTI-220E2	AS	185471	7	MTI-220E4TP	AS	062607	10	
2	120	1	51	2	7-7/16	MTI-220-3A	AS	190326	4	MTI-220-3E2	AS	185480	7	MTI-220-3E4TP	AS	062615	10	
2	240	1	51	2	7-7/16	MTI-220-3A	AS	190334	4	MTI-220-3E2	AS	185498	7	MTI-220-3E4TP	AS	062623	10	
2	480	1	51	2	7-7/16	MTI-220-3A	AS	190342	4	MTI-220-3E2	AS	185500	7	MTI-220-3E4TP	AS	062631	10	
2.5	120	1	52	2	8-1/2	MTI-225A	AS	190350	4	MTI-225E2	AS	185519	7	MTI-225E4TP	AS	062640	10	
2.5	240	1	52	2	8-1/2	MTI-225A	AS	190369	4	MTI-225E2	AS	185527	7	MTI-225E4TP	AS	062658	10	
2.5	480	1	52	2	8-1/2	MTI-225A	AS	190377	4	MTI-225E2	AS	185535	7	MTI-225E4TP	AS	062666	10	
3	120	1	48	2	11-7/16	MTI-230A	AS	190385	5	MTI-230E2	AS	185543	8	MTI-230E4TP	AS	062674	11	
3	240	1	48	2	11-7/16	MTI-230A	AS	190393	5	MTI-230E2	AS	185551	8	MTI-230E4TP	AS	062682	11	
3	480	1	48	2	11-7/16	MTI-230A	AS	190406	5	MTI-230E2	AS	185560	8	MTI-230E4TP	AS	062690	11	
4	120	1	48	2	17-1/2	MTI-240A	AS	190414	5	MTI-240E2	AS	185578	8	MTI-240E4TP	AS	062703	11	
4	240	1	48	2	17-1/2	MTI-240A	S	190422	5	MTI-240E2	AS	185586	8	MTI-240E4TP	AS	062711	11	
4	480	1	48	2	17-1/2	MTI-240A	AS	190430	5	MTI-240E2	AS	185594	8	MTI-240E4TP	AS	062720	11	
5	120	1	47	2	19-1/4	MTI-250A	AS	190449	5	MTI-250E2	AS	185607	8	MTI-250E4TP	AS	062738	11	
5	240	1	47	2	19-1/4	MTI-250A	S	190457	5	MTI-250E2	AS	185615	8	MTI-250E4TP	AS	062746	11	
5	480	1	47	2	19-1/4	MTI-250A	AS	190465	5	MTI-250E2	AS	185623	8	MTI-250E4TP	AS	062754	11	
6	240	1	47	2	24-19/32	MTI-260A	AS	190473	5	MTI-260E2	AS	185631	8	MTI-260E4TP	AS	062762	11	
6	480	1	47	2	24-19/32	MTI-260A	AS	190481	5	MTI-260E2	AS	185640	8	MTI-260E4TP	AS	062770	11	
7	240	1	49	2	27-1/2	MTI-270A	AS	190490	6	MTI-270E2	AS	185658	9	MTI-270E4TP	AS	062789	12	
7	480	1	49	2	27-1/2	MTI-270A	AS	190502	6	MTI-270E2	AS	185666	9	MTI-270E4TP	AS	062797	12	
10	240	1	46	2	40-1/32	MTI-2100A	AS	190510	8	MTI-2100E2	AS	185674	11	MTI-2100E4TP	AS	062498	14	
10	480	1	46	2	40-1/32	MTI-2100A	AS	190529	8	MTI-2100E2	AS	185682	11	MTI-2100E4TP	AS	062500	14	
12	240	1	46	2	47-9/16	MTI-2120A*	AS	190537	8	MTI-2120E2*	AS	185690	11	MTI-2120E4TP*	AS	062519	14	
12	480	1	46	2	47-9/16	MTI-2120A	AS	190545	8	MTI-2120E2	AS	185703	11	MTI-2120E4TP	AS	062527	14	
15	240	1	50	2	53-19/32	MTI-2150A*	AS	190553	8	MTI-2150E2*	AS	185711	11	MTI-2150E4TP*	AS	062535	14	
15	480	1	50	2	53-19/32	MTI-2150A	AS	190561	8	MTI-2150E2	AS	185720	11	MTI-2150E4TP	AS	062543	14	

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified except Models with *(Exceeds 48 Amps).
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified except Models with *(Exceeds 48 Amps).